

MT300


Articulated Spider Boom Lift

-  Power Facilities
-  Commercial hubs
-  Transport hubs
-  Landscaping
-  Venues, Schools

Technical Data

Working Height	30m
Platform Height	28m
Outreach	12m (230kg) 14m(120kg)
Boom tilting	0 – 80°
Jib tilting	+80°/-90°
Basket rotation	+90°/-90°
Turret rotation	360° (非连续)
Max lift capacity	230 kg (2 人)
Basket size	1.35x0.73x1.25m
Gradeability	17° (30%)
Travel	履带式
Diving speed	0-1.5 km/h
Op. Temp.	-20°~40° 摄氏度
Wind speed	≤ 12.5m/s
AC Motor Plug	5x4mm ²
AC Motor	7.5kw

Engine	15.9kw
Total mass	5600 kg
Diesel engine	KUBOTA柴油发动机
Diesel capacity	30L
Reservoir capacity	100L
Electric power	380V三相电机

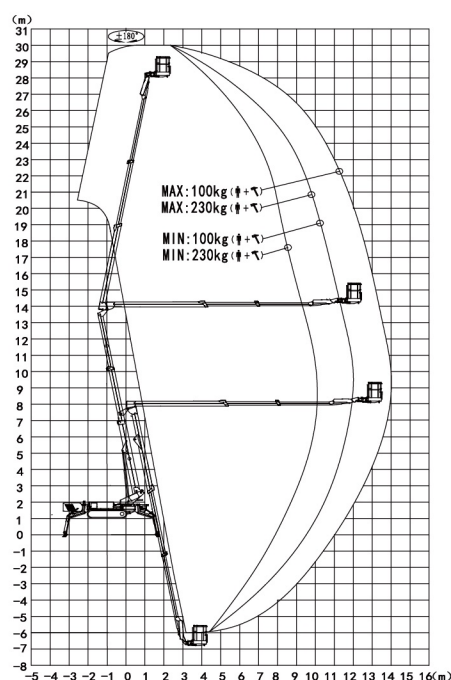

Articulated Spider Boom Lift

MT300



Specifications

Track length		2m
Outrigger working area	Length	5.5m, 6.7m
	Width	4.7m, 3.5m
With platform	Height	1.99m
	Length	6.9m
	Width	1.35m
Without platform	Height	1.99m
	Length	6.2m
	Width	0.89m
Ground clearance		0.2m

